



Modular Carpet Tile

PIXEL
LIVER




 *Instafloor*



PI – 01




 **Instafloor**

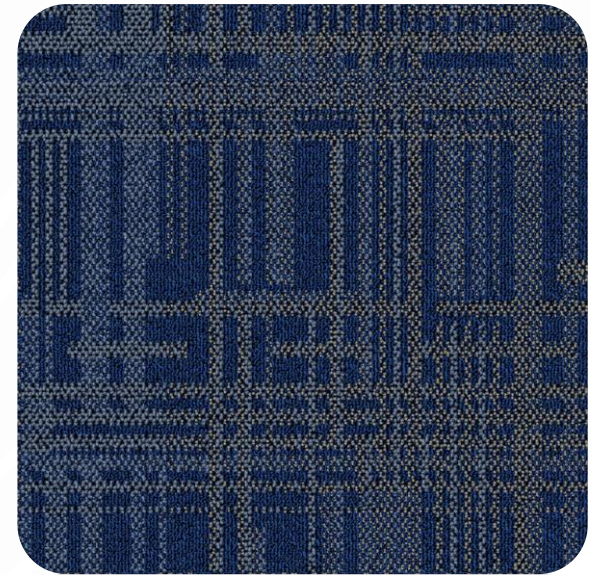

PI – 02




 Instafloor

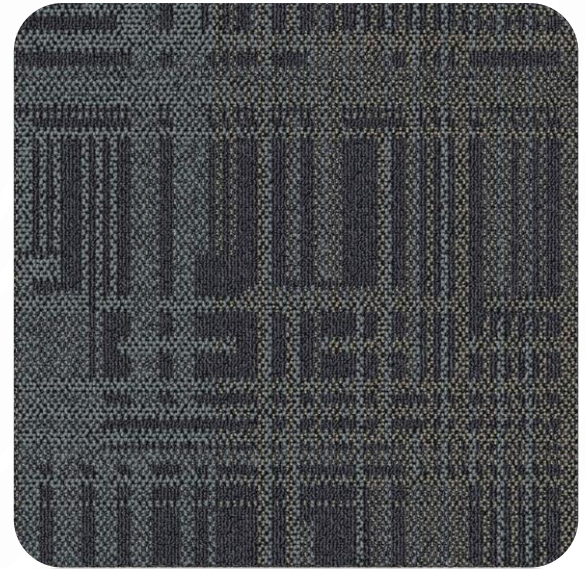

PI - 03




 **Instafloor**

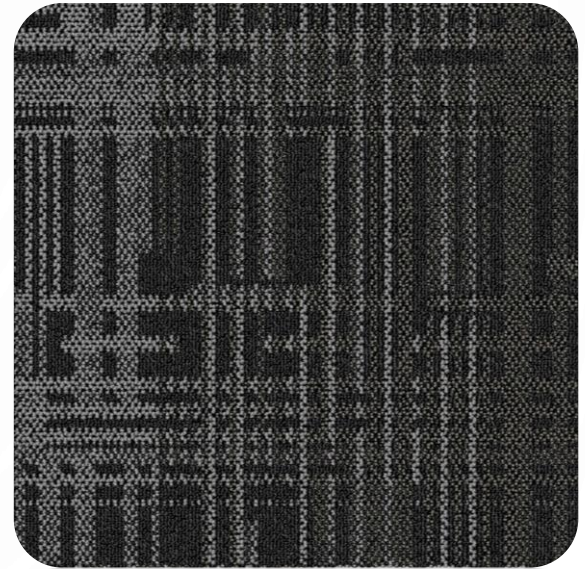


PI – 04

PIXEL


Construction	Multi Level Scroll
Yarn	Aquafil Chromo Nylon
Dye Method	100% Solution Dyed
Stitch	48
Gauge	1/12 High-Low Loop
Pile Height	4 – 5 mm
Pile Weight	700 gsm/ Sqmtr
Total Thickness	7mm~7.5mm(± 5%)
Secondary Backing	PVC, reinforced by Glass Fiber
Total Size	50cm x 50cm
Packing	5 Sqmtr / Box




ASHLAR



DIRECTIONAL



BRICK



QUARTER TURN



Ultraviolet Resistance



Antistatic



Reduced Flammability



Wear Resistance



100% B.C.F. Yarn



Dimensional Stability



Anti-slip



Passed Various Tests



Comfortable



ISO9001:2008



GB/T 19001-2008



EN14041:2004

ISO14001:2004 GB/T 24001-2004