

 **LX Hausys**
"Formerly LG Hausys"

Supreme

Commercial Flooring
Office zone, Retail, Multipurpose

Durable


Commercial Flooring
Office zone, Retail, Multipurpose



Sheet



SPR1302

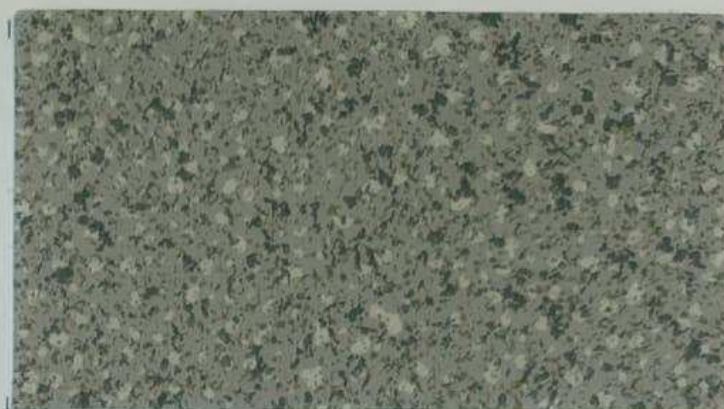


SPR1307



SPR9032



Structure

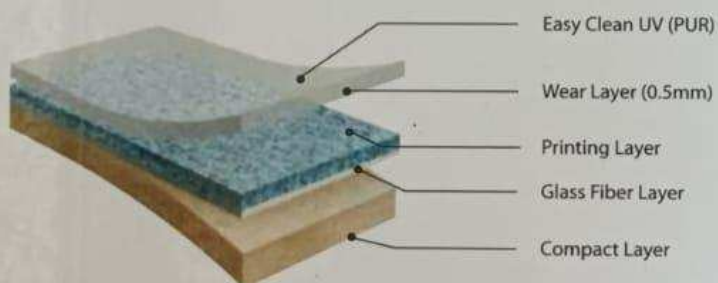

Applications



Office



Departmental Store



Restaurant



Shopping Mall

Feature



Durable and dimensionally stable

- Not easily worn out against heavy traffic
- Glass paper inlaid structure allows strong resistance to heat and moisture



Environmentally friendly


- Formaldehyde and toxic gas free
- 100% recyclable



Low maintenance cost and anti-bacterial

- Easy Clean UV allows easy maintenance
- Superior resistance to outer contaminants and bacteria

Structure

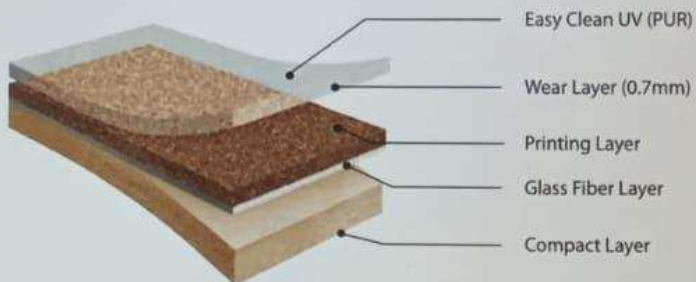

Advantage

Enhanced Convenience With Advanced Technology

LG Hausys' distinguished surface treatment technology - Easy Clean UV - helps keep your space clean through its unique Lotus effect mechanism.



The Truth Of Durability


The durability of Durable Neo exceeds expectations and overcomes bias. 0.7mm pure vinyl wear layer gives Durable the extra durability and wear resistance not found in homogeneous vinyl flooring.

More stable structure with dimensional layer

All Vinyl flooring naturally expands and shrinks as temperatures fluctuate. However, if one is looking for the exception that remains stable even in severe heat, cold and humidity, LG Hausys' Heterogenous flooring Durable is the answer.

Good Design Works Better

Newly expanded design series to inspire creative interior designs. The versatile combination of more natural, contemporary and sophisticated patterns.

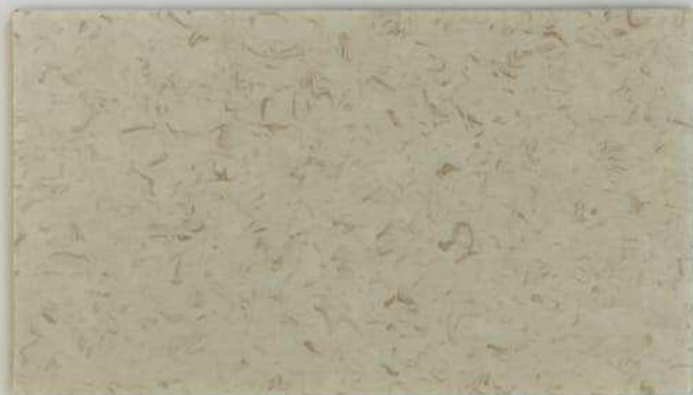

DU90011



DU99902



DU99906



DU99916

Supreme



TECHNICAL DATA			
Characteristic	Standard	Unit	Result
Type of flooring			Sheet
Surface treatment			Easy Clean UV (PUR)
Classification	ISO 10874(EN685)		33-42 Residential Heavy Commercial Moderate
Roll length		m	20
Width	ISO 24341 (EN 426)	mm	2,000
Thickness	ISO 24346 (EN 428)	mm	2.0
Weight	ISO 23997 (EN 430)	g/m ²	2,864
Wear layer thickness	ISO 24340 (EN 429)	mm	0.5
Residual indentation	ISO 24343-1 (EN 433)	mm	0.05
Dimensional stability	ISO 23999 (EN 434)	%	L:-0.05, W:-0.10
Color fastness to light	ISO 105-B02	-	6
Castor chair test	ISO 4918 (EN 425)	-	Fulfilled
Flexibility	ISO 24344 (EN 435)	-	No Crack



Our Popular Products :

Familia	
Retail, Residential, Office	1.0mm x 2M x 35M

Palace	
Residential, Office	1.5mm x 2M x 25M

Bright	
Residential, Office, Retail	1.6mm x 2M x 25M

Mini	
Residential, Office, Retail	2.0mm x 2M x 20M

Decotile	
Retail, School, House, Office, Café and Restaurant	2.0 x 180 x 1200mm

Leisure	
Gymnasium, Sports Center, Education	4mm x 1.8M x 16M

Eq Floor	
Gymnasium, Yoga, Library, Preschool	6mm x 1.83M x 13M

Rexcourt	
Sports, Gymnasium, Multipurpose	6.5mm x 1.8M x 15M

Origin	
Healthcare, Education, Retail	2mm x 2M x 20M

Unite	
Healthcare, Education, Retail	2mm x 2M x 20M

Origin Conductive	
Electronics, IT, Healthcare, Access Floor, Operating Room, laboratory	2mm x 2M x 20M

Durable

TECHNICAL DATA			
Characteristic	Standard	Unit	Result
Type of flooring			Sheet
Surface treatment			Easy Clean UV (PUR)
Classification	ISO 10582		34 / 43
Roll length		m	20
Width	ISO 24341 (EN 426)	mm	2,000
Thickness	ISO 24346 (EN 428)	mm	2.0
Weight	ISO 23997 (EN 430)	mm	3,050
Wear layer thickness	ISO 24340 (EN 429)	g/m ²	0.7
Residual indentation	ISO 24343-1 (EN 433)	mm	< 0.05
Dimensional stability	ISO 23999 (EN 434)	%	< 0.10
Flexibility	ISO 24344 (EN 435)		No Crack
Castor chair test	ISO 4918 (EN 425)		No Damage
Color fastness to light	ISO 105-B02		> 6
Wear Resistance	EN 660-2		T
Chemical resistance	ISO 26987 (EN 423)		Good
Slip Resistance	DIN 51130		R9
	EN 13893		DS
Impact Sound Insulation	ISO 10140	dB	5
Reaction to fire	EN 13501-1		Bfl-S1
Body Voltage	EN 1815	kV	< 2



Delight Interiors India Pvt. Ltd.
delightinteriors@gmail.com, www.delightinteriors.com